


A

EE 31806151645

11/05/99



THE ASSISTANT COMMISSIONER FOR PATENTS
Washington, D.C. 20231

DOCKET NUMBER: AT9-99-561
DATE: 11-5-99

Sir:

Transmitted herewith for filing is the Patent Application of:

Inventor(s): John W. Dunsmoir, Sandra H. Jacobs, and Christopher Daniel Reech

For: **Method and System for Producing Dynamic Web Pages**

Enclosed are:

- ☒ Patent Specification and Declaration
- ☒ Eight (8) sheets of drawing(s). (Formal)
- ☒ An assignment of the invention to International Business Machines Corporation (includes Recordation Form Cover Sheet).
- ☐ A certified copy of a _____ application.
- ☒ Information Disclosure Statement, PTO 1449 and copies of references.

The filing fee has been calculated as shown below:

For	Number Filed	Number Extra	Rate	Fee
Basic Fee				\$760.00
Total Claims	44 - 20	24	x 18 =	\$432.00
Indep. Claims	3 - 3	0	x 78 =	\$ 0.00
MULTIPLE DEPENDENT CLAIM PRESENTED				x 260 = \$ 0.00
TOTAL				\$1192.00

- ☒ Please charge my Deposit Account No. 09-0447 in the amount of \$1,192.00. A duplicate copy of this sheet is enclosed.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account 09-0447. A duplicate copy of this sheet is enclosed.
- ☒ Any additional filing fees required under 37 CFR §1.16.
- ☒ Any patent application processing fees under 37 CFR §1.17.

Respectfully submitted,

By David A. Mims, Jr.

David A. Mims, Jr.
Registration No. 32,708
Intellectual Property Law Dept.
IBM Corporation
11400 Burnet Road, Zip 4054
Austin, Texas 78758
Telephone (512) 823-0950

JC675 U.S. PTO
09/435004



11/05/99

09/435004 11/05/99

Application for United States Patent

Title: Method and System for Producing Dynamic Web Pages

Inventors: (1) John W. Dunsmoir (Citizenship: USA)

2000 Shadow Brook Circle

5 Round Rock, Texas 78681

(2) Sandra H. Jacobs (Citizenship: USA)

6505 Sans Souci Cove

Austin, Texas 78759

(3) Christopher Daniel Reece (Citizenship: USA)

10 2204 Rimrock

Austin, Texas 78733

Agent: Robert H. Frantz

Registration Number 42,553

P.O. Box 23324

15 Oklahoma City, OK 73123-2324

U.S.A.

CROSS-REFERENCE TO RELATED APPLICATIONS

(CLAIMING BENEFIT UNDER 35 U.S.C. 120)

None.

FEDERALLY SPONSORED RESEARCH

5

AND DEVELOPMENT STATEMENT

This invention was not developed in conjunction with any Federally sponsored contract.

MICROFICHE APPENDIX

Not applicable.

0
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
21

Method and System for Producing Dynamic Web PagesBACKGROUND OF THE INVENTIONField of the Invention

This invention pertains to the arts of computer network, Internet and intranet
5 web server technology, and especially to the arts of providing dynamic and variable
web page content from a web server.

Description of the Related Art

The Internet and the World Wide Web have become critical, integral parts of
commercial operations, personal lives, and the education process. Development
10 activities of content for the World Wide Web is at an all-time high level, with
expectations of tremendous growth to come. This is driven by even greater increases
in the number of people and systems which are connected to the Internet and are
exploiting its capabilities.

At the heart of the Internet content is Internet browser technology and Internet
15 server technology. An Internet server contains content which is available to systems
and browsers which have Internet connectivity. The most common type of Internet
content is Hyper Text Markup Language documents.

Hyper Text Markup Language ("HTML") documents provide the content
building blocks for designing World Wide Web pages. The HTML standard can trace
20 its roots as far back as the 1960's. The Internet (interconnected network) was

established in the early 1960's as nothing more than an interconnection of computers on a worldwide basis. By the mid-1970's, many research labs, universities and government agencies were on the network, and it was at that time known as ARPAnet.

5 A major problem that existed, however, was the lack of a standard protocol for communication. Each of the various groups was using its own protocol to run its internal network.

 In 1982, a network protocol was implemented based on a paper entitled, "A Protocol for Packet Network Internetworking", published in 1974 by Cerf and Kahn.

10 The paper set forth a method for transferring data between computers which were interconnected via the Internet, which became known as the Transmission Control Protocol/Internet Protocol ("TCP/IP"). This standard was quickly adopted around the world for Internet communications, and remains so today.

 In 1991, an application called "Gopher" was created at the University of
15 Minnesota. Gopher provided a useful method of presenting menus and organizing files on the Internet. The World Wide Web ("WWW") expanded upon the Gopher approach. Originally created by the European High-Energy Particle Physics Lab (CERN), the WWW added many improvements including graphics and, most importantly, hypertext links.

20 Under the CERN WWW definition, hypertext is a method of adding links to particular words, phrases, or graphics in a document such that when a user selects the element in the document, the user is automatically provided with a connection to

another document or web server. To achieve this, the WWW implemented three technologies:

- (a) HTML which was used to design and present web pages,
- (b) the Hyper Text Transfer Protocol for transmitting these web pages
5 over the WWW, and
- (c) the conceptual definition of a web browser, which is a WWW client computer application that interprets and displays web pages received from a source such as a web server.

Using the WWW, HTTP and a web browser, users can easily create documents
10 that are displayed to other users which visually look like pages in a book rather than a traditional computer screen appearance.

In 1993, the National Center for Supercomputing Applications (NCSA) at the University of Illinois at Champaign-Urbana developed and released a very powerful browser called "Mosaic". Due to it's being offered free of charge, it is estimated that
15 over 2 million users had begun to use it to browse documents on the WWW by 1995. In the years following, Netscape Communications Corporation released its Navigator browser, and then Microsoft Corporation released its Explorer browser, both of which were compatible with HTML and HTTP.

HTML is analogous to the editor's marks on a written document. The "marks"
20 of the markup language specify to the web browser how the information should be displayed to the user. For example, if one wants text to be displayed in bold, all that

needs to be done is to "mark" the text to be displayed in bold. This is accomplished by surrounding the text with control characters, or "tags", which are bracketed by "<>" in the text. An HTML document is a text file containing information to be displayed, control characters, hyperlinks, and sometimes executable code. For

5 example, a bold line of text in an HTML file would look like:

` This text is now bold `

The `` tag turns on the bold attribute and the `` tag turns off the bold attribute. Normally, the control characters are not displayed to the user by the browser software. Other control characters can set the color and size of text, define

10 the use of a background color or graphics pattern or file, define the size and shape of tables, define drop down choice lists, locate and set the size for the insertion and display of graphics data, create radio buttons, and show hyperlinks as graphics or specially marked text. HTML is well known within the art.

HTML provides an elegant way to easily create pages that can contain

15 complicated links to other documents through the use of hypertext links. Although HTML gained rapid acceptance, soon users wanted much more graphical power and content control capabilities.

FIGURE 1 shows the fundamental client-server arrangement of Internet and intranet communications. A client browser computer (1) is provided with Internet

20 access (2) to the World Wide Web (3) through common means such as a dial-up

telephone line and modem, cable modem, or local area network ("LAN"). A web server computer (5) is likewise provided with Internet access (4) to the World Wide Web (3) using similar means, or higher-bandwidth means such as T1 and T3 data lines. Alternatively, client and servers may be interconnected via an Intranet (6), such as a

5 corporate LAN. These arrangements are well known within the art.

FIGURE 2 shows the prior art process of fetching and displaying static HTML pages from a web server over an Internet (3) or Intranet (6). When the user selects (10) a Universal Resource Locator ("URL") or hyperlink to view on his or her browser computer (1), the browser creates an HTTP request to fetch the file

10 requested. The browser then transmits an HTTP GET command (11) via the World Wide Web (3) to the web server computer (5). The web server receives the command (12), and retrieves the requested static HTML file from its memory. Finally, the web server (5) transmits (13) the HTML file using the HTTP protocol to the client browser computer (14), where it is received (15), interpreted and displayed to the user.

15 The general limitation with basic HTML is that it is generally static in content. After a developer has designed an HTML page, the page is essentially fixed in its content, layout and appearance. Each time a user loads that page, it will look essentially the same as the day it was created by the developer.

A number of technologies have been developed to extend the capabilities of

20 HTML to allow for some levels of dynamic, or changing, content of HTML pages, including:

- (a) HTML extensions, such as "server-side includes",

- (b) Common Gateway Interface ("CGI"), and
- (c) Client-side scripting.

A "server-side include" is a method of handling changing information provided that information resides on the same server as the base HTML page. A special tag is added in the HTML code for the base page that specifies the additional HTML file to be included. When the web server receives an HTTP request for a document, the web server first opens the requested document and searches to see if any additional files need to be included. If so, the server includes the file(s) and then sends the newly built document to the browser. An example "server-side include" is given in Table 1.

10

Table 1: Example Server-Side Include

Contents of the base HTML file:

15

<HTML>

<HEAD><TITLE>Example of a server-side include</TITLE></HEAD>

<BODY>

<!-- #INCLUDE FILE="MyInc.html" -->

<P>I can put other information here</P>

</BODY>

20

</HTML>

Contents of the "included" file MyInc.html:

<H1>Some simple text to include</H1>

FIGURE 3 shows the basic steps involved for the "browsing" of HTML pages which implement "server-side includes". The process is very similar to the process to fetch static HTML pages as shown in FIGURE 2 and described *supra*, with the exception that when the web server (5) receives the HTTP GET command, it retrieves (20) the HTML file, parses it for the server-side includes, fetches the data indicated by the server-side includes, replaces the HTML of the server-side includes with the data, and transmits (14) the whole HTML file (with included data) to the client browser computer (1).

Although "server-side includes" provide a basic method of incorporating information that changes periodically, they place a processing burden on the server since the server has to parse the entire document every time the document is requested. An additional problem is that available options on different web server platforms vary depending on the specific type of server being used.

Common Gateway Interface ("CGI"), is another well-known method for providing user interactivity. CGI is more sophisticated than "server-side includes". CGI scripting is a method that links the web server to other software applications, not just files, that can be executed on the server. CGI relies upon an additional layer to the HTTP transaction protocol which allows additional information to be passed from the browser to the server. This additional information is often information users fill out in forms that they submit, but it is not limited just to forms. When the server

receives the information, it is passed to the CGI application and then sends the output of the application back to the browser. The output of the CGI application is a newly built HTML document.

Table 2 contains an example PERL application which could be executed by a web server in conjunction a CGI call from an HTML page when the page has been accessed by a browser.

Table 2. Example PERL Application

```

print "Content-type: text/html\n\n";
10 print "<HTML>\n";
print "<HEAD><TITLE>This is a CGI Example</TITLE></HEAD>";
print "<BODY>\n";
print "<H1>Display this text on the page on the browser.</H1>\n";
print "</BODY>\n";
15 print "</HTML>\n";

```

When executed, the application of Table 2 would return the proper HTML code to display the text "Display this text on the page on the browser". Although this method is a more powerful way of allowing HTML code to be created dynamically based on information provided by the user, and it also provides a way to store user input on the server, this method also can require significant web server processing bandwidth, and may have varying feature support from one server platform to another.

The third well-known technology which allows for some level of dynamic content of HTML pages is "client-side scripting". Client-side scripting allows for client-executable code to be included in the HTML page, and to be executed on the browser/client platform after the HTML page is downloaded from the web server.

- 5 Since the client platform is executing the script, the web server bandwidth problem of "server-side includes" and CGI scripting are avoided. The HTML version 4.0 standard supports client-side scripting using `<SCRIPT>` and `<NOSCRIPT>` tags.

And although just about any language could be used to implement the scripts, the most common in use today are JavaScript, JScript, VBScript and ECMAScript.

- 10 The browser platform must support the particular script language, or it will not be executed correctly.

- Using a client-side scripting language, the developer can insert instructions directly into the HTML code so that the script can be executed by the client platform when the page is loaded from the web server. The result of executing the script is that
- 15 the script may generate some HTML code that tells the browser how to display information. By using other features such as Cascading Style Sheets and Document Object Models, client-side script processes can directly modify properties and attributes of document objects thereby causing the browser to modify the way the information is displayed.

- 20 Table 3 contains an example using JavaScript to display the current date on the web page.
-

Table 3. Example Client-Side Script in JavaScript

```

<HTML>

<HEAD><TITLE>Example of a client-side script in JavaScript

</TITLE></HEAD>

5  <BODY>

    <SCRIPT LANGUAGE="JavaScript">

        <!--Hide this code from non JavaScript enabled browsers

        document.writeln("<H1>Today is </P>");

        var today = new Date();

10  var text= "The current date is " + (today.getMonth() + 1) + "/"

        + today.getDate() + "/" + today.getYear() + ".";

        document.writeln(text);

        //-->

    </SCRIPT>

15  </BODY>

    </HTML>

-----

```

The client-side script of Table 3 does nothing in browsers which do not
 20 support JavaScript, but will retrieve the system month, day, and year and print it on
 the browser screen prefaced by "The current date is".

Because this script is processed by the client computer platform, not the web server, the client platform must process the HTML document to find any scripts that need to be compiled and/or executed. When the document is loading, the script may actively create HTML code. The primary problem with client-side scripting is the

5 compatibility issue, where many client browser software packages currently installed do not support the client-side scripting.

Therefore, there is a need in the art for a server-side technology which provides the ability to map dynamic data into an existing HTML document or HTML template. Further, there is a need in the art for this server-side technology to be

10 platform independent, and to be indifferent to various hardware and software functionalities which may or may not be resident on a web server.

Finally, there is a need in the art for this server-side technology to be suitable for real-time processing of dynamic data into HTML templates without a burdensome processor bandwidth requirement of the web server processor.

15

SUMMARY OF THE INVENTION

The foregoing and other objects, features and advantages of the invention will be apparent from the following more particular description of a preferred embodiment of the invention, as illustrated in the accompanying drawing wherein like reference
5 numbers represent like parts of the invention.

The method and system described produces HTML web pages which have dynamic content, but are based upon another HTML page which has been used as a template. The invention extracts a layout information, such as HTML tags, from a base HTML page to create a template, and then maps dynamic content into the
10 template. The preferred embodiment disclosed is a JAVA servlet and the dynamic content may originate from any computer-readable media, such as communications interfaces, databases, or file systems.

BRIEF DESCRIPTION OF THE DRAWINGS

The following detailed description when taken in conjunction with the figures presented herein present a complete description of the present invention.

5 FIGURE 1 discloses the prior art relationship between a client browser computer and a web server computer which are communicably interconnected by an Internet, the World Wide Web, or an intranet.

FIGURE 2 shows the basic prior art process of retrieving static HTML pages from WWW server by a browser.

10 FIGURE 3 depicts the prior art process of retrieving static HTML pages which incorporate "server-side includes".

FIGURE 4 discloses the hardware and software architectures of typical web server systems and client browser systems.

FIGURE 5 shows the fundamental process of the invention.

15 FIGURE 6 sets forth the functional flow of the servlet

FIGURES 7 and 8 depict in detail the functional steps of the invention.

DETAILED DESCRIPTION

In the preferred embodiment, object-oriented programming techniques using Java are employed. As various implementations in Java of methods and data objects may yield equivalent execution and interface characteristics, the following detailed
5 description of the Boson and its related support objects will be given in terms of the "contract" for each object rather than actual Java code. Where appropriate, the preferred embodiment will be highlighted in terms of use of specific Java methods to implement an operation, but those who are skilled in the art will readily recognize that alternative embodiments may be realized, without departure from the scope and spirit
10 of the invention.

The selection of Java allows the functionality of the invention to be realized in a portable Java servlet, which can be installed on virtually any web server platform regardless of hardware, software and operating system employed on the web server. For purposes of example, the preferred web server platform is IBM's RS/6000
15 computer platform running IBM's AIX operating system. However, a Java servlet can equally well be used on a Microsoft Windows NT and IBM-compatible personal computer web server platform, as well as a Sun Microsystems Solaris-based workstation. The invention can be realized using other object-oriented programming languages, such as C++, or other structured languages such as VisualBasic, but the
20 Java implementation offers the widest range of platform compatibility, an acceptable runtime execution profile, and highly compact, reusable code.

Prior to understanding the exact preferred implementation of the invention in Java, it is useful to have some fundamental understanding of Java servlets, how they operate, and their advantages. Java servlets are similar to applets in many ways.

Applets and servlets are both run-time interpreted code. This means that the source

5 software is compiled not to actual machine-dependent executable instructions, but to bytecodes. Bytecodes are primitive level operations which are not specific to a particular processor or operating system. Each platform that executes Java servlets and applets has a run-time interpreter which receives the applet or servlet, verifies it (checks it for errors and security violations), and interprets it into executable

10 instructions for its processor. This allows a Java applet (or servlet) to be executed on virtually any operating system on virtually any hardware platform without recompiling the source code, making it truly portable code. Applets, however, are usually executed on a client platform, not a server platform, and typically include some user interfaces such as displays, form fields, etc. Servlets, however, typically reside and

15 execute on web servers, and thus do not have a graphical user interface but rather interface to server components. For example, a servlet typically receives its data or "call" from a server as a result of an HTTP POST operation from a client machine.

Turning to FIGURE 4, the strikingly similar architectures of web servers and web browsers/clients are illustrated. The web server (5) typically consists of an

20 operating system (25) such as AIX or UNIX, under which non-portable applications (26) written in languages such as C execute. Also in the web server platform, Java servlets (27) can run, which are real-time verified and interpreted by a Java Interpreter

(28). The operating system (25), non-portable applications (26) and servlets (27) may all access the server system hardware, including the CPU (31), user I/O (33) such as a monitor and keyboard, disk I/O (32) such as a SCSI interface, and a network interface card ("NIC") (30) such as a Ethernet LAN interface card. The CPU (31) is usually a
5 higher bandwidth enterprise-class unit, such as that in an IBM AS/400. Typically integrated into the operating system are necessary protocol stacks and functionality, such TCP/IP and HTTP, but this may also be provided as a non-portable application. The NIC (30) is interconnected to a Intranet (6) or directly to a router to the Internet (3). A significant component of most web servers is the database and file system (34),
10 where HTML web pages, CGI scripts, and user databases are stored. User I/O is typically minimal, present primarily for maintenance and web master use.

As shown in FIGURE 4, the architecture of a client browser system (1) is very similar to that of a web server, but with some notable differences. Similar to the web server, the client browser machine (1) has an operating system (36) which is more
15 commonly MacOS or Microsoft Windows, and runs non-portable applications (37) including various desktop programs and a web browsers such as Netscape's Navigator or Microsoft's Explorer. The client browser can also run Java applets (38), rather than servlets, which are similarly verified and interpreted by a Java interpreter. The client machine (1) is also provided with aNIC (41), but more typically a clientNIC is LAN
20 interface card or dial-up modem. The user I/O (42) is highly utilized on a client browser system (1) as graphical user interfaces incorporate use of the system display, mouse and keyboard (45). The disk I/O (43) is of moderate complexity, typically not

providing sophisticated database capabilities but just local program and file storage.

The CPU (44) is usually of a PowerPC or Pentium class, which is more appropriate for desktop computing applications.

Implementation of the base technology of the invention, called Boson and

- 5 Quark, as a Java servlet provides several distinct advantages over other prior art approaches. Under previous approaches, a technology such as this may have been implemented as a development tool function, which would require the web developers to adopt the tool as their tool of choice. This is a technical and marketing burden that would be difficult to overcome. Following other prior art approaches would be to
- 10 implement this invention as a proprietary server program, not a Java servlet, which may require special programming syntax, execution engines, maintenance programs, etc. On the contrary, implementing the base technology of the invention as a servlet which interfaces to common, standardized components of all web servers allows the invention to be a run-time function of the server which is tool and platform
- 15 independent.

- Boson and Quark are the heart of the invention technology. Both are Java classes, which contain within them method and data object implementations. FIGURE 5 shows the fundamental invention process (100). A base web document (101), such as a static HTML page, is used as a template for the HTML to be produced and sent
- 20 to the browser (105).

The Quark data object (103) maps the static content of the HTML template (101), such as radio buttons, drop down lists, tables, graphic images, background and

style definitions, and text information, to variable data structures. The Boson methods (104) then parse, or tokenize, the content of each line of the HTML template based upon known HTML TAG structures, and it replaces the static content of the page with different, variable content, referred to as the dynamic content (102). The resulting

- 5 "dynamic" content HTML page (105) has the same visual layout as the original template, but presents possibly radically different information. For example, all the text may be replaced with text of a different language. Or, the background and style may be replaced, allowing the same information to be presented to a user based on his or her preferred presentation of colors and visual indicators. Or, a basic HTML
- 10 layout can be applied to completely different information in real-time, presenting visually distinct pages with similar layout structures.

- As the methods and data of Boson and Quark are implemented as a servlet, it can be operated real-time on a web server, allowing for real-time data to be merged with static HTML templates for applications such as stock quote presentation, merged
- 15 video feeds and advertisement banners, remote system monitoring and maintenance (alarms, industrial systems, etc.). This also eliminates the need for a special development tool to provide non-real-time conversions from one data-plus-layout structure to another data-plus-layout structure. As shown in FIGURE 5, dynamic data or content (102) may be received by Quark (103) from a number of sources, including
- 20 but not limited to computer files, databases, other Java classes, session objects, or computer networks.

Quark is instantiated by the web server system, and it receives two parameters, namely the Boson tag name and the Dynamic content for the HTML Template Boson tag. Turning to FIGURE 6, the functional flow (110) of Quark is shown. First, new instances of Quark and Boson are instantiated (111, 112). Then, Quark adds entries (113) into the system's dictionary, preferably the *java.util.Dictionary*, for each HTML tag to be mapped to dynamic structures. This is done in the preferred embodiment using the standard Java "put" method. Table 4 shows a typical "put" method for a single HTML tag which maps the HTML template to a variable data structure.

10

Table 4: Quark "put" statement

```

Boson b;

Quark q;

q = new Quark();

q.put("background", botBack);

```

15

A separate "put" statement is preferably used for each HTML tag and structure type desired to be converted to dynamic content, including lists, table parameters, actions, radio buttons, check boxes, etc. As a final action, the servlet creates a Boson object and passes parameters of the Quark instance, "q", and a string object containing the HTML template name, as shown in Table 5.

Table 5: Servlet Creates Boson Object

Boson b = new Boson ("t1.html", q);

5

The Boson method then finishes the task of mapping the dynamic content to the template, and returns the modified HTML page back to the client browser.

Turning to FIGURE 7, the preferred embodiment of the Boson method is depicted.

The Boson (130) method first imports (131) the system standard input/output and
 10 utility functions or classes. In the preferred embodiment, this is simply done using a
 JAVA "import" declaration for *java.io.** and *java.util.**. Then, Boson (130) opens
 the HTML file (132), reads (133) each line of the HTML source text file, builds (134)
 a single string buffer containing all of the HTML text, performs the TAG parsing and
 HTML content mapping process, and then either creates a new file (136) containing
 15 the mapped HTML content or passes the mapped HTML content directly back to a
 browser. Finally, the input file is closed (137).

Reading of the lines of text from the HTML template file is preferably done
 using the "readLine" standard Java method from the *JAVA.IO* package, which is well
 known within the art. An outer control construct, such as a "while" or "for" loop, can
 20 be used to step through the text lines of the file until end-of-line is detected, appending
 one or more lines of HTML text from the file into a single string buffer. This allows

the entire contents of the HTML template file to be passed to a parsing and mapping process using a single string buffer, which is an optimal format to allow quick and efficient scanning of the string buffer for HTML tags. The standard JAVA "append" method can be used to append the lines of text into the string buffer. For robustness and reliability, the outer control loop preferably contains a maximum number of lines to be processed to detect infinite loop conditions and keep the servlet from "locking up". In the preferred embodiment, another method is implemented which performs the basic parsing and mapping (135) of the single line of HTML text. In alternate embodiments, this could be in-line code of Boson itself, a subroutine, or another function. FIGURE 8 depicts the logical flow of the parsing and mapping method (135), a string buffer containing the line of text from the HTML template file and a Quark object, both of which are passed to the method instance by the Boson method described supra.

The parsing and mapping method (135) first tokenizes the contents of the string buffer, preferably using the JAVA standard "toString" method of the package *JAVA.IO*. The tokens are examined for their contents, searching for HTML tags which exist in the system dictionary, and if they are found, the contents, as defined by each HTML tag, are replaced with the dynamic content. The tag with the new content is appended to an output HTML file.

More specifically, as shown in FIGURE 8, the parsing and mapping method (135) creates (150) a new, empty string to hold the output HTML which will be created. Then, the input string, which contains all of the HTML from the template file,

is scanned and parsed (151) for HTML tags. For each tag that is found, if the tag is in the system dictionary (152), it is examined to determine if it is an array object, such as a table or drop down list, or a non-array object, such as a block of text. If it is a non-array tag (153), a new line of HTML is built (154) using the HTML tag and the new dynamic content designated for that tag, and the new tag-plus-content is appended to the output HTML string. Then, unless all the input HTML has been processed (156), the next tag is found and processed.

If an HTML tag is found that is an array (153), the array is processed (161) in each of its dimensions similarly to the non-array tag. The parameters of the array, such as number of elements in a drop down list or number of columns and rows in a table, are adjusted to match the dimensions of the dynamic content to be placed into the output file. A new HTML tag and content is then created and appended to the output string (162), and the input HTML string is checked again to see if there are more tags to be processed (156).

If an HTML tag is found in the input string but it is not found in the system dictionary (152), it may be skipped (160) and processing may proceed to the next tag, thereby essentially deleting the tag from the output HTML string so that it does not map from the input HTML to the output HTML. Optionally, the unfound HTML tag may be copied directly from the input string to the output string, causing it to be present unchanged in the output HTML. The preferred embodiment is a JAVA-based implementation, and uses the standard JAVA methods such as "indexOf" to find the position of the next HTML tag within the input HTML string, "get" to determine if a

tag is known within the *java.util.Dictionary*, "substring" for extracting a portion of the input HTML string such as the tag and its contents, and "append" for appending new tags with new content to the output HTML string. For robustness, an outer control loop, such as a "for" or "while" construct, for controlling the maximum number of tags
5 to be processed can preferably be used to keep the parsing and mapping process from being executed in an infinite loop.

Finally, when all the input HTML tags have been processed (156), the new HTML string is ready to be returned (157) to the "calling" process, and eventually the new HTML string will be stored in a new, dynamically mapped HTML file, or may be
10 transmitted to a browser in real-time for viewing and interaction.

It will be understood from the foregoing description that various modifications and changes may be made in the preferred embodiment of the present invention without departing from its true spirit, such as the use of alternate web server platforms, operating systems and data storage means. It is intended that this
15 description is for purposes of illustration only and should not be construed in a limiting sense. The scope of this invention should be limited only by the language of the following claims.

CLAIMS

What is claimed is

1. The method of producing dynamic web page content for transmission on a computer network, comprising the steps of:
5 receiving at least one static web page, said static web page containing layout and content definitions;
extracting said layout definition from said static web page thereby creating at least one template web page; and
mapping dynamic web content into said template web page, thereby creating
10 at least one dynamic web page containing said dynamic content.
2. The method of producing dynamic web page content of Claim 1, wherein said static web page contains Hyper Text Markup Language.
3. The method of producing dynamic web page content of Claim 1, wherein said template web page contains Hyper Text Markup Language.
- 15 4. The method of producing dynamic web page content of Claim 1, wherein said dynamic web page contains Hyper Text Markup Language.
5. The method of producing dynamic web page content of Claim 1, further comprising the step of retrieving said dynamic web content from a computer-readable medium.
- 20 6. The method of producing dynamic web page content of Claim 5, wherein said step of retrieving said dynamic web content from a computer-readable medium includes retrieving said dynamic content from a computer database.

7. The method of producing dynamic web page content of Claim 5, wherein said step of retrieving said dynamic web content from a computer-readable medium includes retrieving said dynamic content from a computer file system.
8. The method of producing dynamic web page content of Claim 5, wherein said step of retrieving said dynamic content from a computer-readable medium includes retrieving said dynamic web content from a computer network interface.
9. The method of producing dynamic web page content of Claim 8, wherein said step of retrieving said dynamic web content from a computer network interface includes retrieving said dynamic content from a local area network interface.
10. The method of producing dynamic web page content of Claim 8, wherein said step of retrieving said dynamic web content from a computer network interface includes retrieving said dynamic content from an Internet.
11. The method of producing dynamic web page content of Claim 1, further comprising the step of receiving a first reference to said static web page and a second reference to said dynamic web content via an Hyper Text Transfer Protocol Post command
12. The method of producing dynamic web page content of Claim 1, further comprising providing a servlet for extracting said template web page from said static web page.

13. The method of producing dynamic web page content of Claim 1, further comprising providing a servlet for mapping said dynamic web content into said template web page.
14. The method of producing dynamic web page content of Claim 1, further comprising the storing of said dynamic web page in a computer-readable media.
15. The method of producing dynamic web page content of Claim 1, further comprising transmitting said dynamic web page over a computer network.
16. The method of producing dynamic web page content of Claim 15 wherein said computer network includes a local area network.
17. The method of producing dynamic web page content of Claim 15 wherein said computer network includes an Internet.
18. A computer program product for use with a web server system to create dynamic web documents, comprising:
- a computer usable medium having computer readable program code means embodied in said medium for receiving a static web document, said static web document having layout definition and content definition;
- a computer usable medium having computer readable program code means embodied in said medium for extracting said layout definition and creating a template web document;

a computer usable medium having computer readable program code means embodied in said medium for receiving dynamic web content suitable for mapping into a web document; and

a computer usable medium having computer readable program code means embodied in said medium for mapping said dynamic web content into said template web document, thereby creating a dynamic web page.

- 5
19. A computer program product according to Claim 18, wherein said static web page comprises a Hyper Text Markup Language web page.
20. A computer program product according to Claim 18, wherein said template web page comprises a Hyper Text Markup Language web page.
- 10
21. A computer program product according to Claim 18, wherein said dynamic web page comprises a Hyper Text Markup Language web page.
22. A computer program product according to Claim 18, wherein said computer readable program code means for receiving a static web document comprises
- 15
- computer readable program code means, embodied in said media, for retrieving said static web page from a computer database.
23. A computer program product according to Claim 18, wherein said computer readable program code means for receiving a static web document comprises
- 20
- computer readable program code means, embodied in said media, for retrieving said static web page from a computer network.
24. A computer program product according to Claim 23, wherein said computer readable program code means for retrieving said static web page from a

computer network comprises computer readable program code means,
embodied in said media, for retrieving said static web page from an Internet.

25. A computer program product according to Claim 18, wherein said computer
readable program code means for receiving a static web document comprises
5 computer readable program code means, embodied in said media, for retrieving
said static web page from a computer file system.
26. A computer program product according to Claim 18 comprising at least one
servlet.
27. A computer program product according to Claim 26 comprising at least one
10 Java servlet.
28. A computer program product according to Claim 18, wherein said computer
readable program code means further comprises computer readable program
code means, embodied in said media, for storing said dynamic web page in a
computer readable medium.
- 15 29. A computer program product according to Claim 29 wherein said computer
readable program code for storing said dynamic web page in a computer
readable medium comprises computer readable program code means,
embodied in said media, for storing said dynamic web page in a computer file
system.
- 20 30. A computer program product according to Claim 29 wherein said computer
readable program code for storing said dynamic web page in a computer
readable medium comprises computer readable program code means,

embodied in said media, for storing said dynamic web page in a computer database.

31. A computer program product according to Claim 18, wherein said computer readable program code means further comprises computer readable program code means, embodied in said media, for transmitting said dynamic web page over a computer network.
32. A computer program product according to Claim 32, wherein said computer network comprises an Internet.
33. A system for producing web pages containing dynamic content, comprising:
- 10 a means for receiving a first web page;
- a means for extracting a layout definition from said first web page;
- a means for receiving a dynamic web content to be mapped into a web page;
- and
- a means for mapping said dynamic web content into said layout definition
- 15 thereby creating a second web page.
34. A system for producing web pages containing dynamic content according to Claim 34 wherein said means for receiving a first web page includes a means for receiving a Hyper Text Markup Language web page.
35. A system for producing web pages containing dynamic content according to
- 20 Claim 35 wherein means for receiving a Hyper Text Markup Language web page includes a means for receiving web pages from a computer database.

36. A system for producing web pages containing dynamic content according to Claim 35 wherein means for receiving a Hyper Text Markup Language web page includes a means for receiving web pages from a computer file system.
37. A system for producing web pages containing dynamic content according to Claim 35 wherein means for receiving a Hyper Text Markup Language web page includes a means for receiving web pages from a computer network.
38. A system for producing web pages containing dynamic content according to Claim 38 wherein means for receiving web pages from a computer network includes a means for receiving web pages from an Internet.
39. A system for producing web pages containing dynamic content according to Claim 34 wherein said means for extracting said layout definition from said first web page comprises a servlet program.
40. A system for producing web pages containing dynamic content according to Claim 34 wherein said means for mapping said dynamic web content into said layout definition and creating a second web page comprises a servlet program.
41. A system for producing web pages containing dynamic content according to Claim 34 further comprising a means for storing said second web page in a computer database.
42. A system for producing web pages containing dynamic content according to Claim 34 further comprising a means for storing said second web page in a computer file system.

43. A system for producing web pages containing dynamic content according to Claim 34 further comprising a means for transmitting said second web page over a computer network.
44. A system for producing web pages containing dynamic content according to Claim 43 wherein said computer network includes an Internet.
- 5

Method and System for Producing Dynamic Web Pages

ABSTRACT

The invention provides systems, computer program products and methods for generating dynamic-content documents suitable for use on and transmission over computer networks, including the World Wide Web and the Internet. The dynamic-content documents are created based upon an extracted layout definition from a static web document with dynamic content mapped into the extracted layout definition. The invention is especially useful for application to Hypertext documents, such as Hyper Text Markup Language documents. The preferred embodiment disclosed is a Java servlet

Prior Art

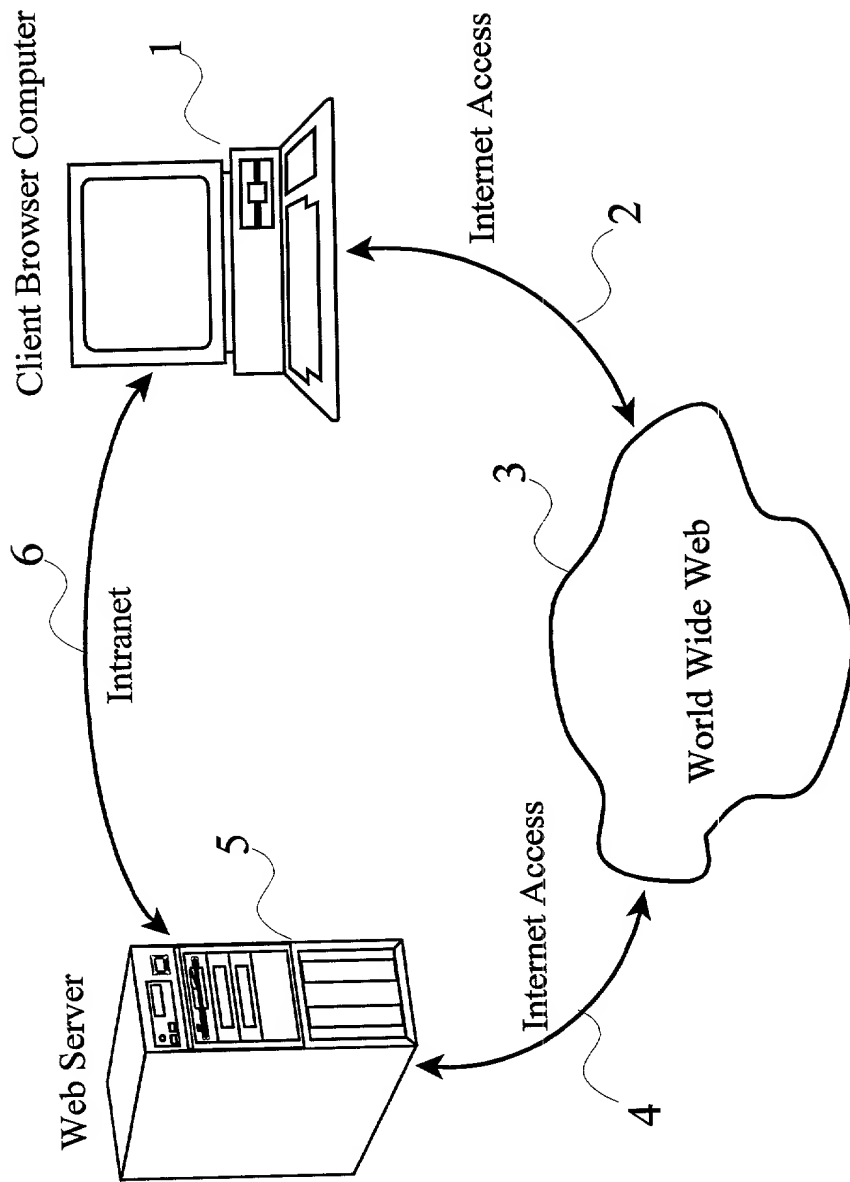


Figure 1

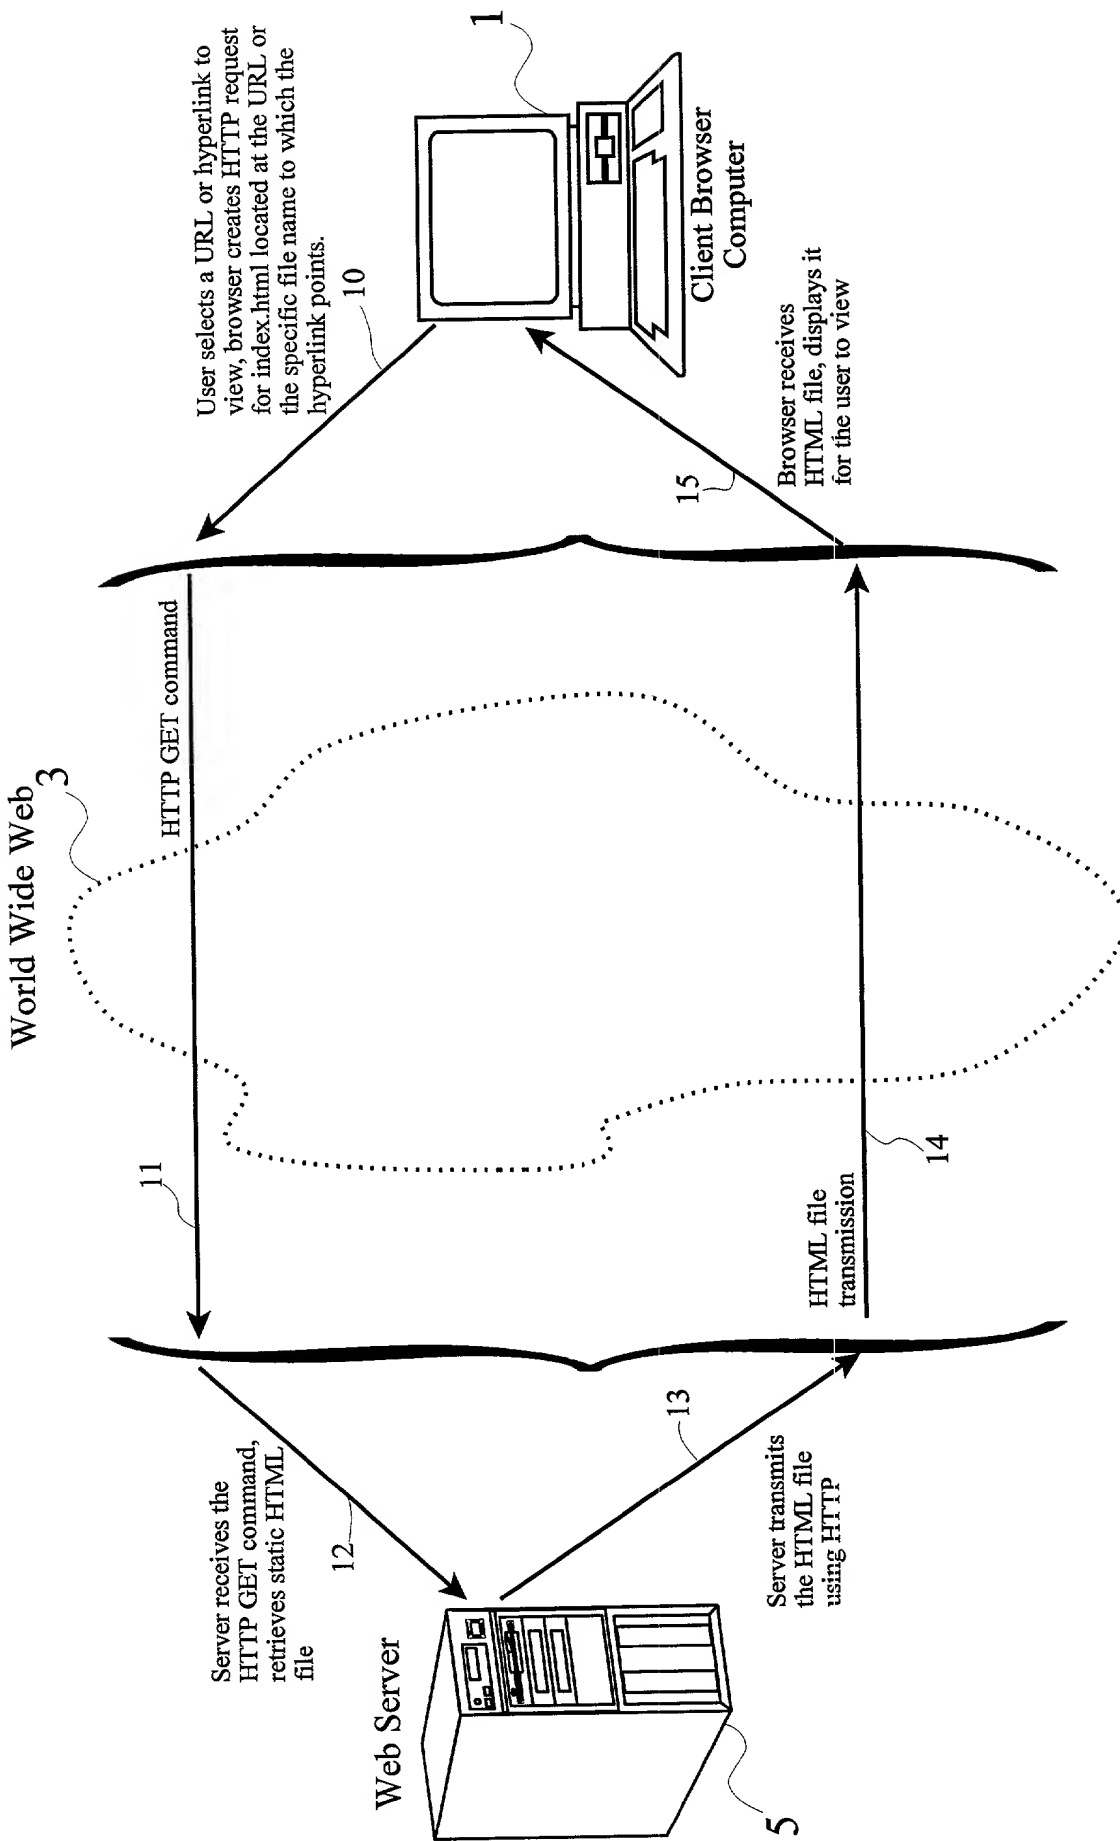


Figure 2

Prior Art

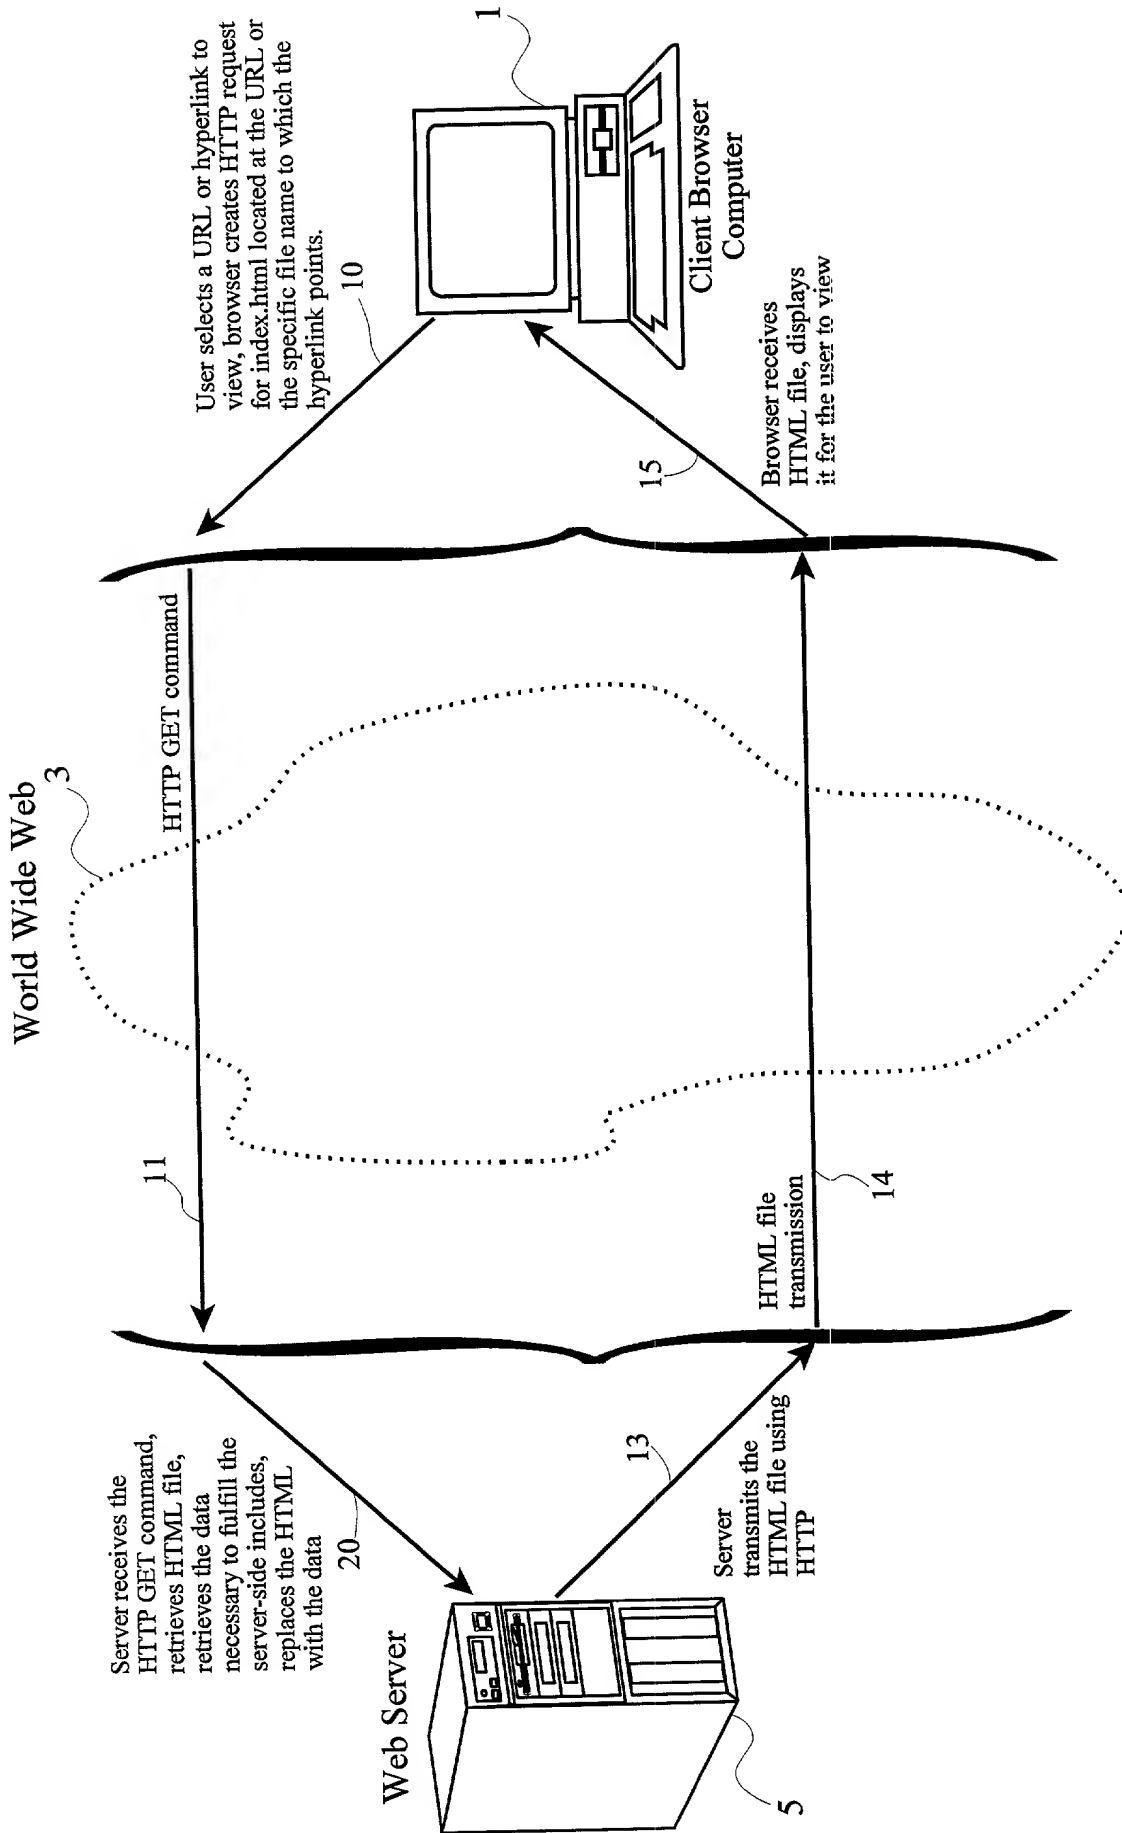


Figure 3

Prior Art

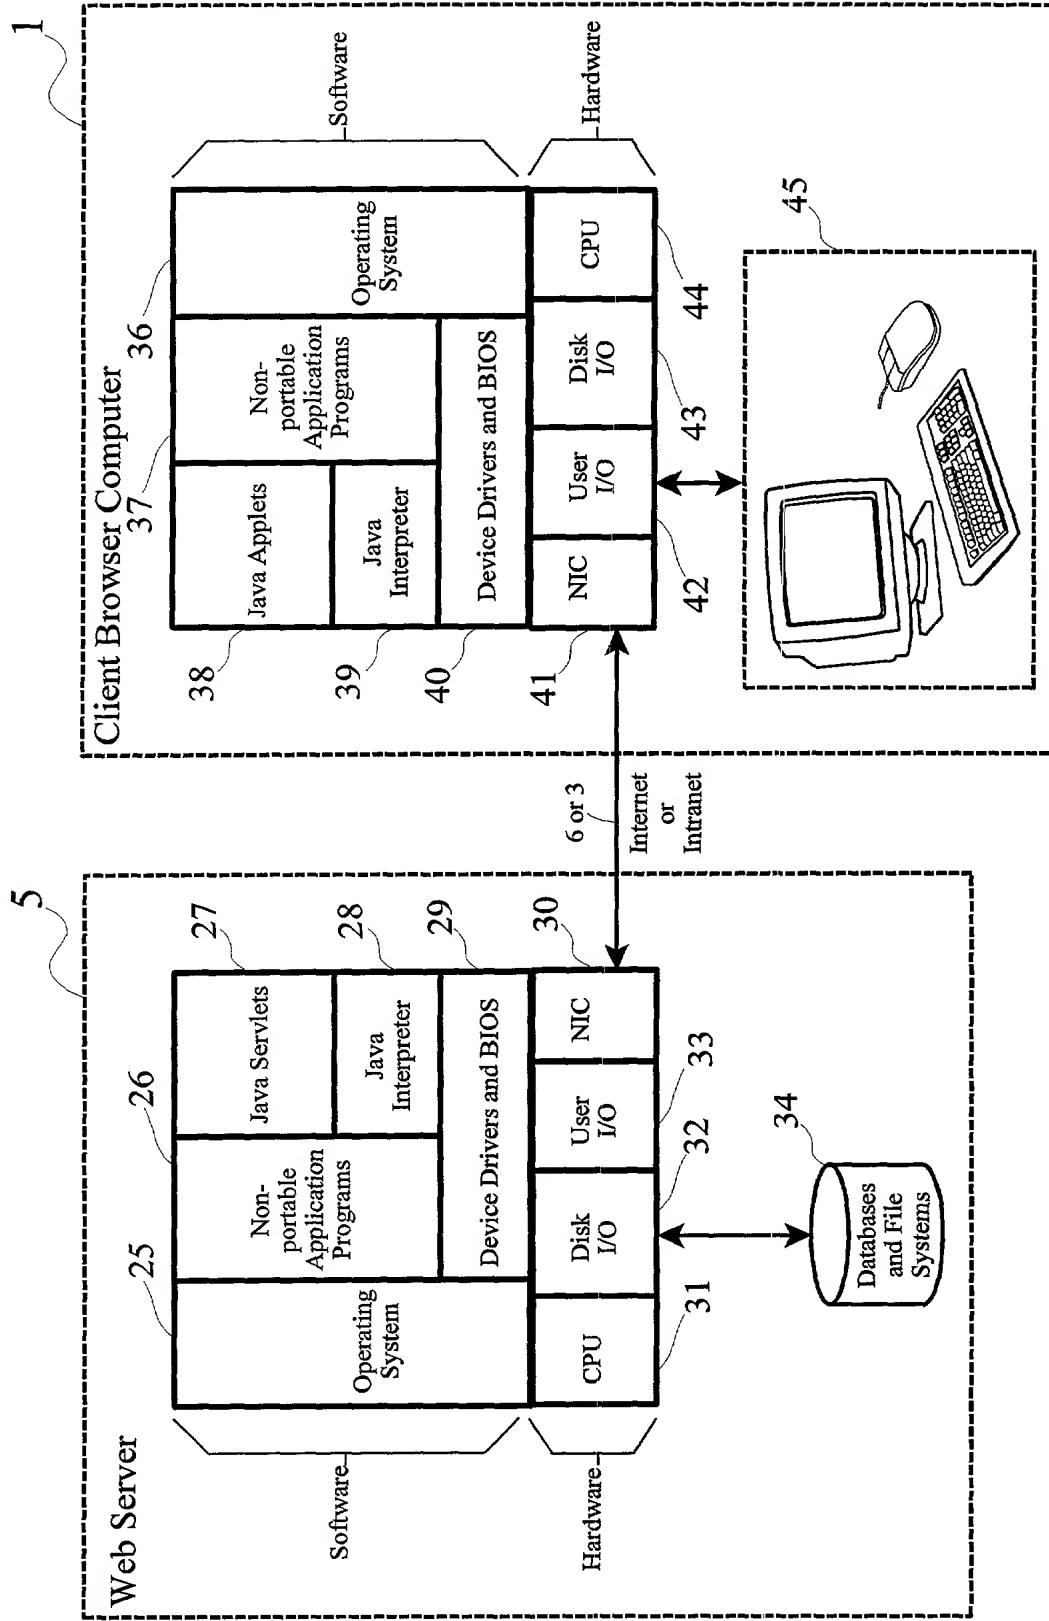


Figure 4

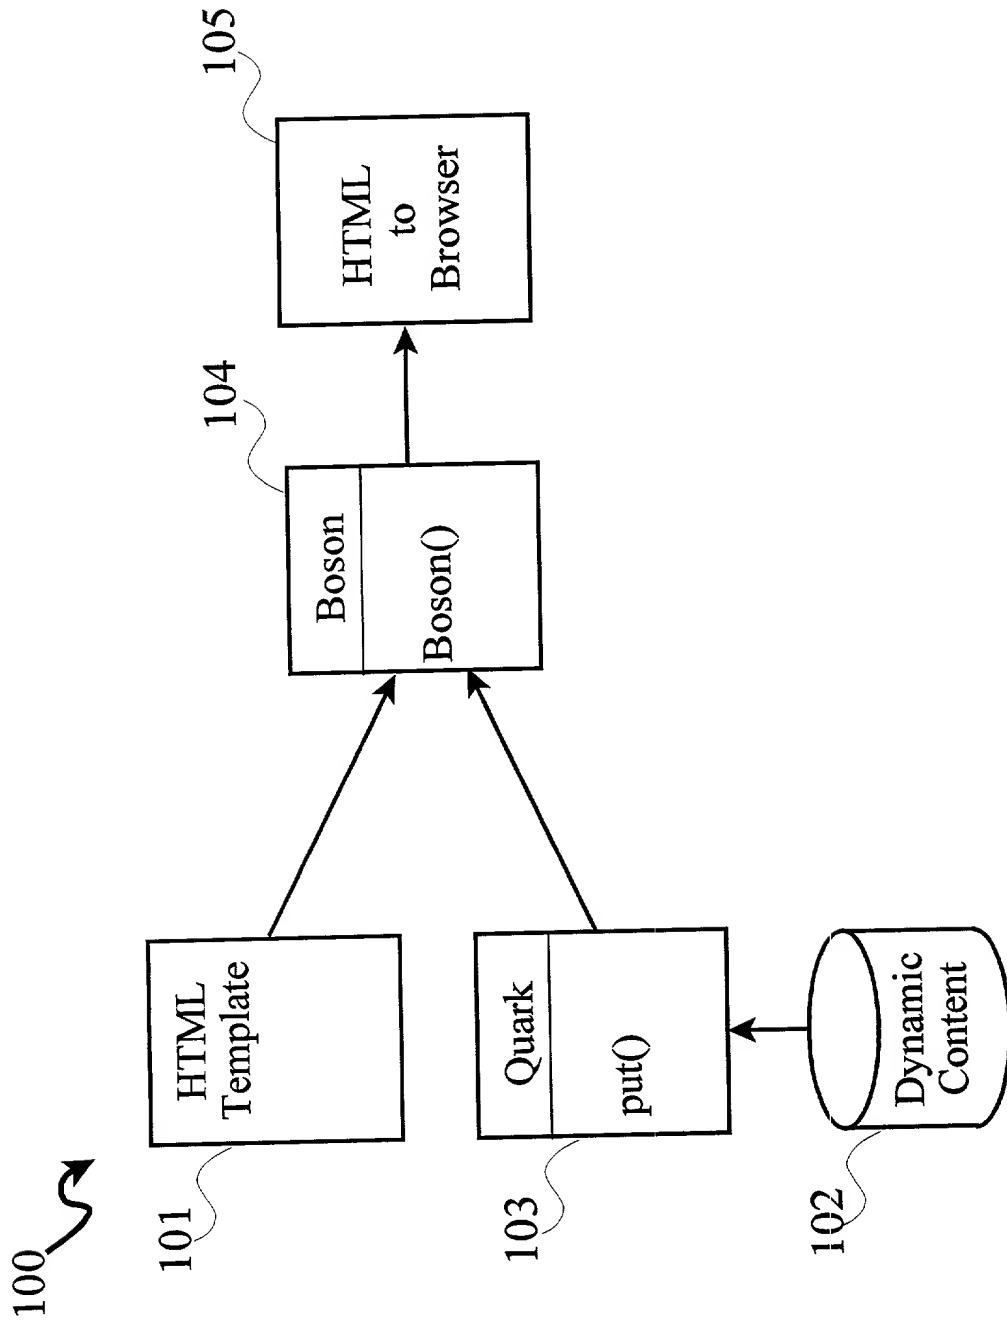


Figure 5

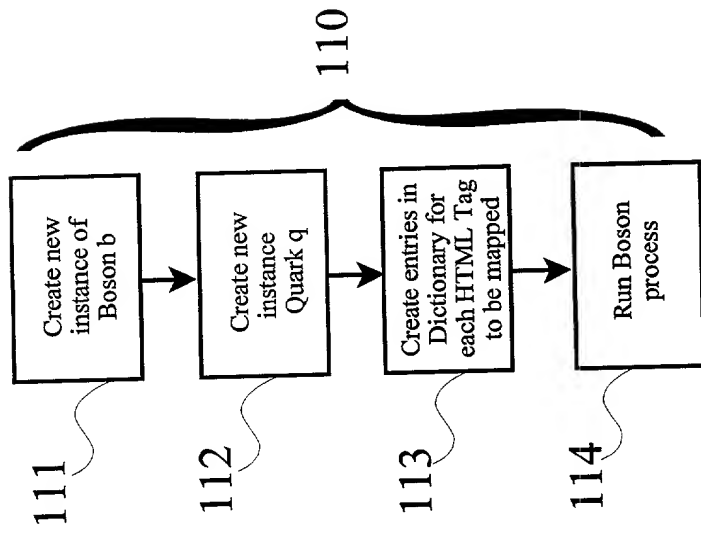


Figure 6

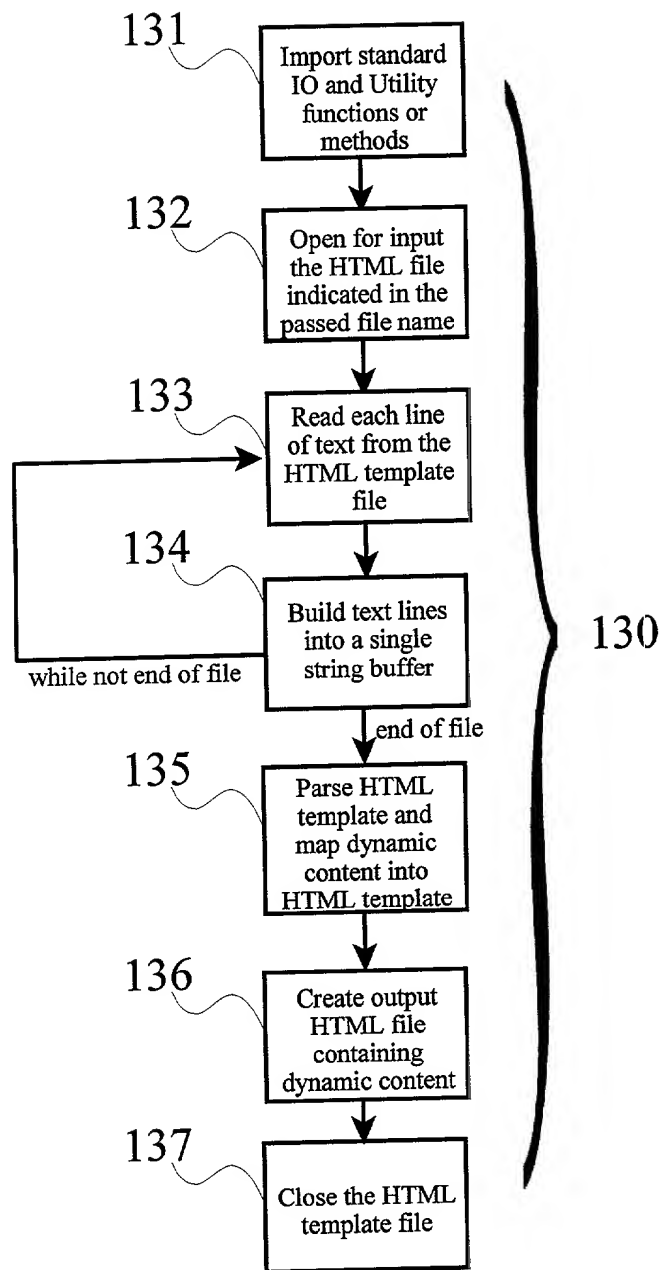


Figure 7

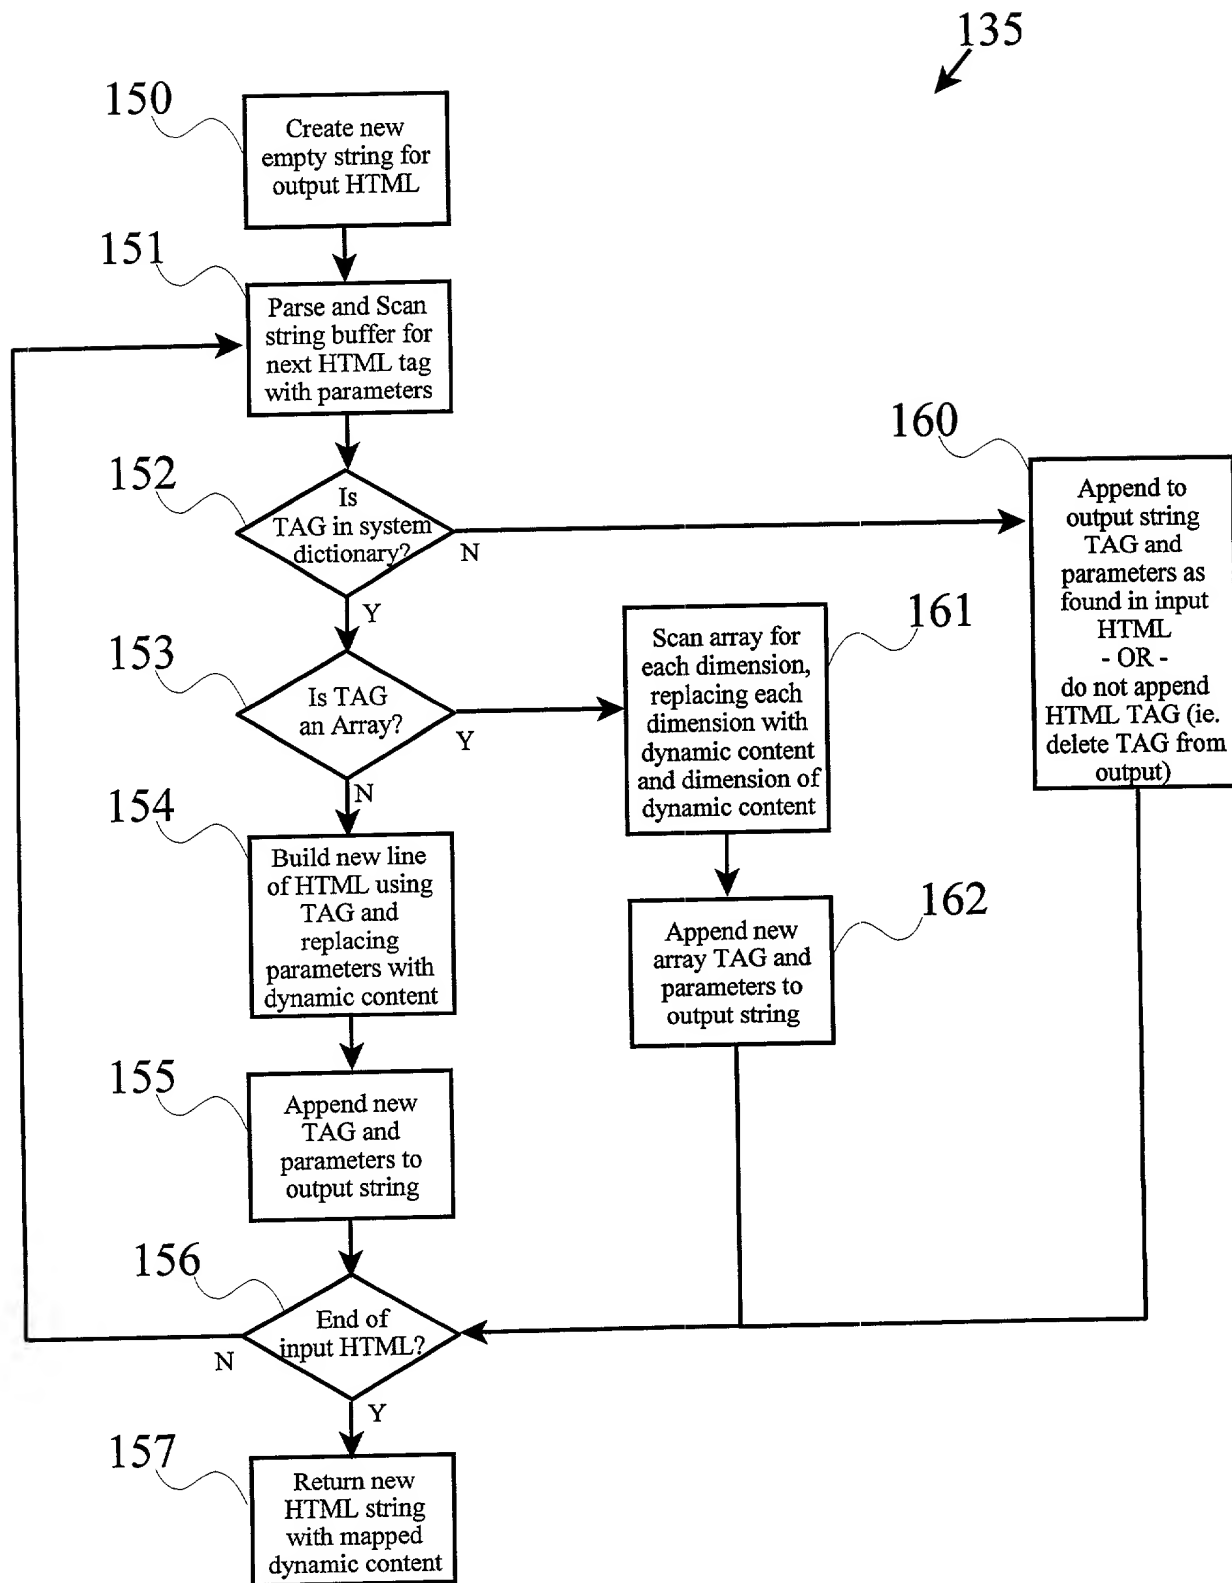


Figure 8

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

"Method and System for Producing Dynamic Web Pages"

the specification of which (check one)

 X is attached hereto.

 was filed on
as Application Serial No.
and was amended on
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):			Priority Claimed
<u> </u>	<u> </u>	<u> </u>	<u> </u> Yes <u> </u> No
(Number)	(Country)	(Day/Month/Year)	

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information material to the patentability of this application as defined in Title 37, Code of Federal Regulations, § 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

<u> </u>	<u> </u>	<u> </u>
(Application Serial #)	(Filing Date)	(Status)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with

the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

John W. Henderson, Jr., Reg. No. 26,907; James H. Barksdale, Jr., Reg. No. 24,091; Thomas E. Tyson, Reg. No. 28,543; Robert M. Carwell, Reg. No. 28,499; Jeffrey S. LaBaw, Reg. No. 31,633; Douglas H. Lefevre, Reg. No. 26,193; Casimer K. Salys, Reg. No. 28,900; David A. Mims, Jr., Reg. No. 32,708; Mark E. McBurney, Reg. No. 33,114; Anthony V. England, Reg. No. 35,129; Volel Emile, Reg. No. 39,969; Leslie A. Van Leeuwen, Reg. No. 42,196; Christopher A. Hughes, Reg. No. 26,914; Edward A. Pennington, Reg. No. 32,588; John E. Hoel, Reg. No. 26,279; Joseph C. Redmond, Jr., Reg. No. 18,753; Marilyn S. Dawkins, Reg. No. 31,140; and Robert H. Frantz, Reg. No. 42,553.

Send correspondence to: **Robert H. Frantz**
P.O. Box 23324
Oklahoma City, OK 73123-2334

and direct all telephone calls to: **(405) 812-5613**
(405) 440-2465 FAX

FULL NAME OF SOLE OR FIRST INVENTOR: John W. Dunsmoir

INVENTORS SIGNATURE: John W. Dunsmoir DATE: 11-4-99

RESIDENCE: 2000 Shadow Brook Circle
Round Rock, TX 78681

CITIZENSHIP: USA

POST OFFICE ADDRESS: 2000 Shadow Brook Circle
Round Rock, TX 78681

FULL NAME OF SECOND INVENTOR: Sandra H. Jacobs

INVENTORS SIGNATURE: Sandra H. Jacobs DATE: 11-4-99

RESIDENCE: 6505 Sans Souci Cove
Austin, TX 78759

CITIZENSHIP: USA

POST OFFICE ADDRESS: 6505 Sans Souci Cove
Austin, TX 78759

FULL NAME OF THIRD INVENTOR: Christopher Daniel Reech

INVENTORS SIGNATURE: Christopher Daniel Reech DATE: 11-4-1999

RESIDENCE: 2204 Rimrock
Austin, TX 78733

CITIZENSHIP: USA

POST OFFICE ADDRESS: 2204 Rimrock
Austin, TX 78733